
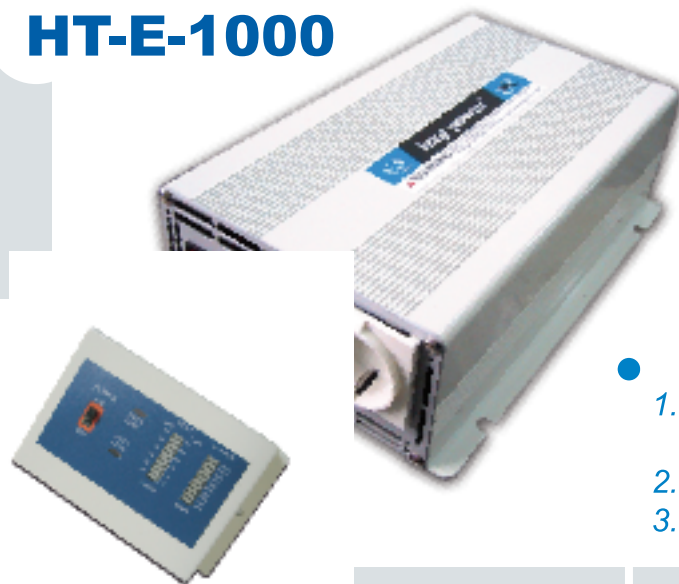


HT-E-1000

1. Compact and dexterous dimension design.
2. Remote control function.
3. External and internal heat sink.

Model No	HT-E-1000-12 · HT-E-1000-24
Continuous output power	1000W
AC output volt	AC100V/AC110V/AC120V/AC220V/AC230V/AC240V
Regulation	$\pm 5\% \sim 8\%$
Frequency	50Hz/60Hz $\pm 2\text{Hz}$
No load current draw	<0.5A · <0.3A
Efficiency	85%~90%
Temp protection	55°C $\pm 5^\circ\text{C}$
Input low volt protection	Yes
Input high volt protection	Yes
Over load protection	Yes
Over temp protection	Yes
DC/AC Isolated	Yes
Output short circuit protection	Yes
Input reverse protection	Yes
Thermal control fan(s)	Yes
Remote control	Yes
Dimension(L x W x H/by mm)	295 x 179 x 82 mm
Weight(by kg)	3.1 kg