
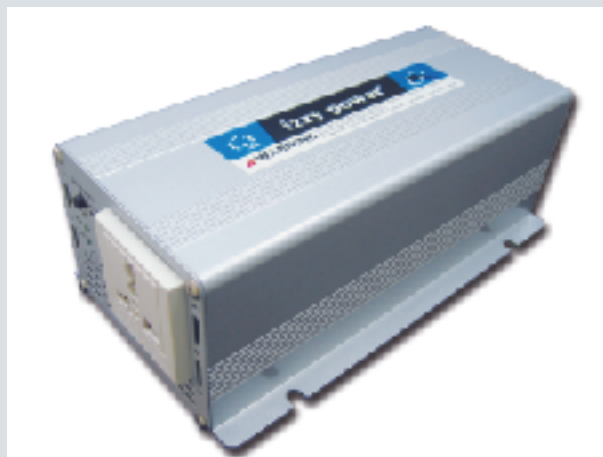


## Sinewave-Series

**HT-S-300**

1. Switched mode design.
2. Pure sine wave output (<2%THD).
3. Input & Output fully isolation design.
4. High Efficiency 87%~90%.
5. High surge in motor start capacity.
6. 5-stage thermal control fan.
7. Frequency 50/60Hz switch selectable.
8. Auto restart.

Model No	HT-S-300-12 · HT-S-300-24 · HT-S-300-48
Continuous output power	300W
AC output volt	AC100V/AC110V/AC120V/AC220V /AC230V/AC240V
Regulation	± 5%~8%
Frequency	50Hz/60Hz ± 2Hz
No load current draw	<0.6A      · <0.3A      · <0.2A
Efficiency	85%~90%
Temp protection	55°C ± 5°C
THD(distortion)	<2%
Input low volt protection	Yes
Input high volt protection	Yes
Over load protection	Yes
Over temp protection	Yes
DC/AC Isolated	Yes
Output short circuit protection	Yes
Input reverse protection	Yes
Thermal control fan(s)	Yes
Dimension(L x W x H/by mm)	250 x 120 x 72 mm
Weight(by kg)	1.9 kg